


RUB RAIL OFFSET BLOCKS (7"x4")		
POST NO.	THICKNESS	BOLT LENGTH
1	4 1/4"	6"
2	3 1/4"	4"
3	2"	4"
4	1"	2"




- NOTES:**
- 1). THE RUB RAIL TO BARRIER CONNECTION END MUST BE ATTACHED FLUSH WITH THE SLOPED TOE OF THE SAFETY BARRIER. INSTALLATION CAN BE SIMPLIFIED BY FABRICATING OR SHOP TWISTING THE RUB RAIL END TO BE CONSISTENT WITH THE SLOPE OF THE BARRIER, HOWEVER, FIELD BENDING USING HEAT IS PERMITTED.
 - 2). STEEL SPACER TUBE IS SCHEDULE 40 GALVANIZED PIPE, 6"x9".
 - 3). ALL HARDWARE ON THIS DETAIL IS COMPATIBLE WITH GUARDRAIL TO BARRIER CONNECTION, TYPES 1-31 AND 1-27.

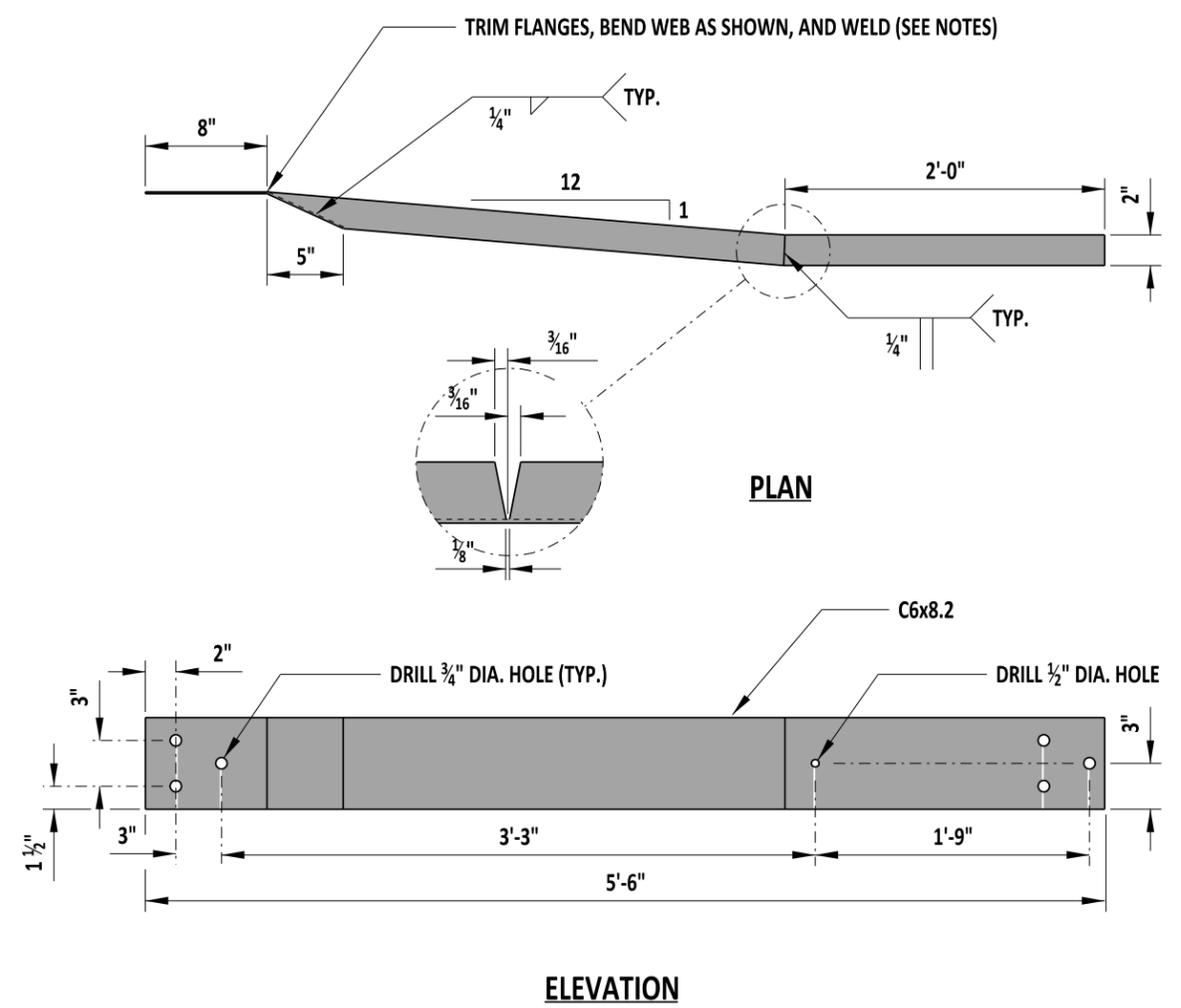


 ENGINEERING SUPPORT 09/01/2020
 DATE
RECOMMENDED

GUARDRAIL TO BARRIER CONNECTION, TYPE 1 HARDWARE
 STANDARD NO. B-8 (2020) SHT. 2 OF 4

REVIEWED 
 DEPUTY DIRECTOR - DESIGN 09/01/2020
 DATE
APPROVED 
 CHIEF ENGINEER 09/01/2020
 DATE